



Slat & Floor Protection System for New and Remodeled Facilities

PORK



Armor-Rock offers real solutions, rigorously tested in the real world to develop a coating system with the substantial durability to perform in production environments.



Protect new and used slats



Safeguard areas around mats



Protect surfaces around stainless steel troughs

Installation Options

Assure the best installation using a VSC professionally trained applicator

OR

DIY installation using VSC detailed guidelines and technical support



1 Prepare surface



2 Blend components



3 Apply to surface



4 Broadcast aggregate

Provides

- Many years of protection from corrosive compounds
- Sound footing for animals to optimize feedings
- Resistance to heavy animal traffic
- Diversion of waste away from slats and into pit
- Easy to clean reducing maintenance costs





“Preventing costly damage, that sets in soon after production begins, is a benefit packaged into Armor-Rock’s unique design.”



Restoration & Protection

VSC provides a wide variety of professional grade products to restore and repair floors, walls, and metal.

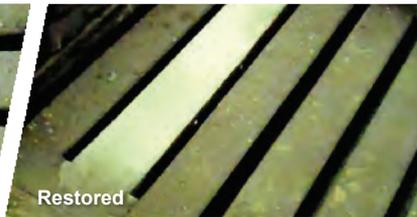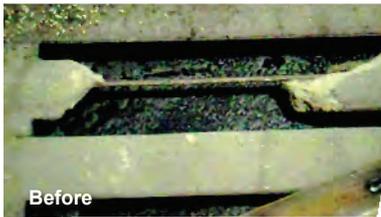

Contact a VSC technical representative for help selecting the appropriate system and information on additional components, availability, and professional installation procedures.

Armor-Rock™ Availability

Armor-Rock Kits

ARMOR-ROCK SYSTEM KIT #AC133-AR

Armor-Rock System Components

(Included in system kit)

System consists of 1.5 Gallon Armorcoat Epoxy + 25 lbs. Admix + 25 lbs. VSC Medium Broadcast. Covers 28 sq.ft. @ 3/16" thickness.

Individual Components

- 1 ARMORCOAT 1300 EPOXY
1.5 GAL #AC133
15 GAL #AC133-15
- 2 ADMIX Combines 25 lbs. Admix to 1.5 gal. Epoxy
25 LBS #520B-25
- 3 SURFACE BROADCAST 25 lbs. per 1.5 gal. batch
50 LBS BAG (MED) #210-520B